



YLI ELECTRONIC




American Standard Electric Strike W/Signal(Stainless steel) Model:YS-138N-S(SS304)

Specification

Dimension	165L*43W*35H(mm)
Voltage	DC12V
Current	12V/280mA±20%
Material	304 Stainless Steel
Feature	Fail Safe / Fail Secure adjustable
Signal Output	Lock Signal with NO/NC/COM Contacts
Bolt Signal	With NO/NC/COM contacts
Durable design	Mechanical test: 1, 000, 000 times
Suitable for	American Standard Mechanical Lock
Door Swing	90 degrees
Weight	0.5kg

Diagram(unit:mm)

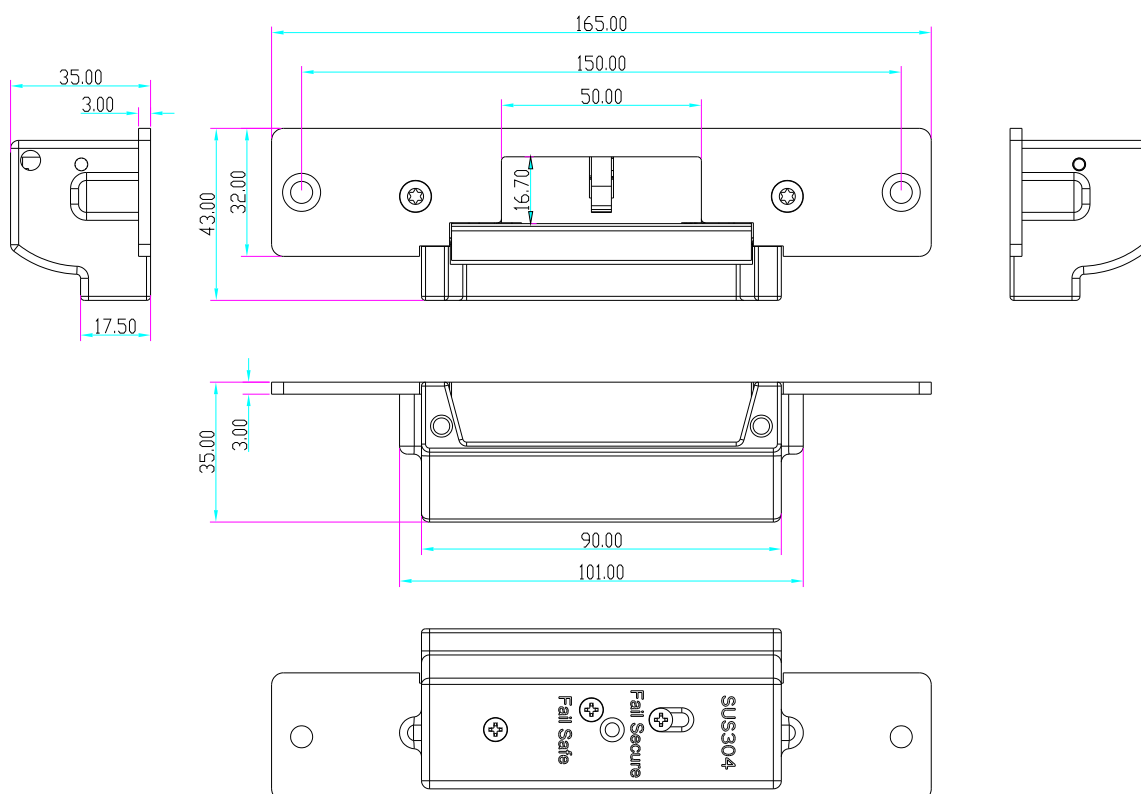


Signal Output

Green: NO
White: COM
Yellow: NC
Red: +
Black: -

Door Status

N.C. contact output : open status
N.O. contact output : closed status
DC 12V(Default); DC 24V(Order)

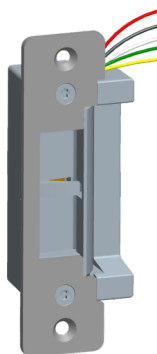


Accessories


If the door frame is too thick, please use the extension plate. Installation is as the follows.



25mm



50mm

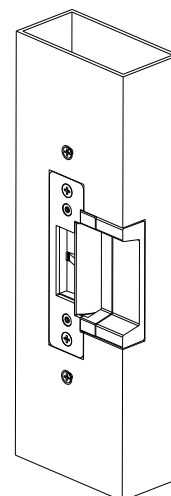


Extension plate(need order)

Function Conversion


You can set the operation mode of Fail Safe or Fail Secure.

Loose the screw and tighten it in the other hole.
Fail Safe(NC): When power off, the door is in the open status.

Fail Secure(NO): When power off, the door is in the closed status.



Fail Secure

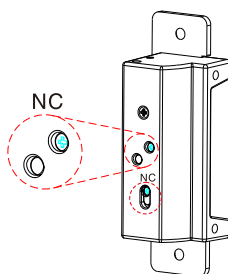


Fail Safe


Options of Mechanical Lock

Suitable for: YS-138, YS-138L

Suitable for: YS-138LK

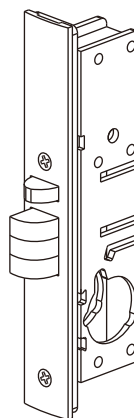


YS-305/306

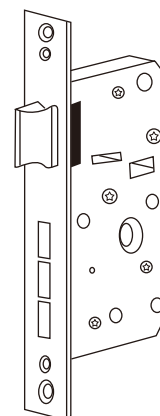

YS-308

Installation Diagram

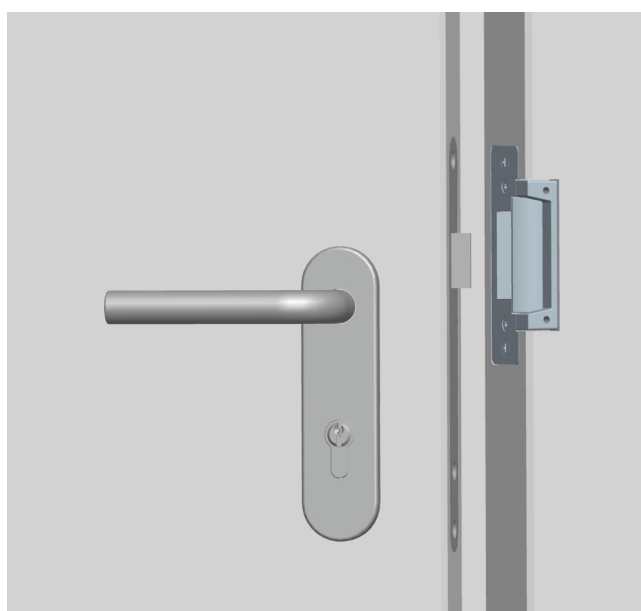

Overall Dimensions

